














## Inspired by nature

What do you feel when you are surrounded by nature? Comfortable, refreshed, alive and happy. With Purion, you can experience this wellness right at home.

Our team of material scientists, researchers, consultants and designers do so by combining old techniques with high quality natural materials so your home will never feel the same again.



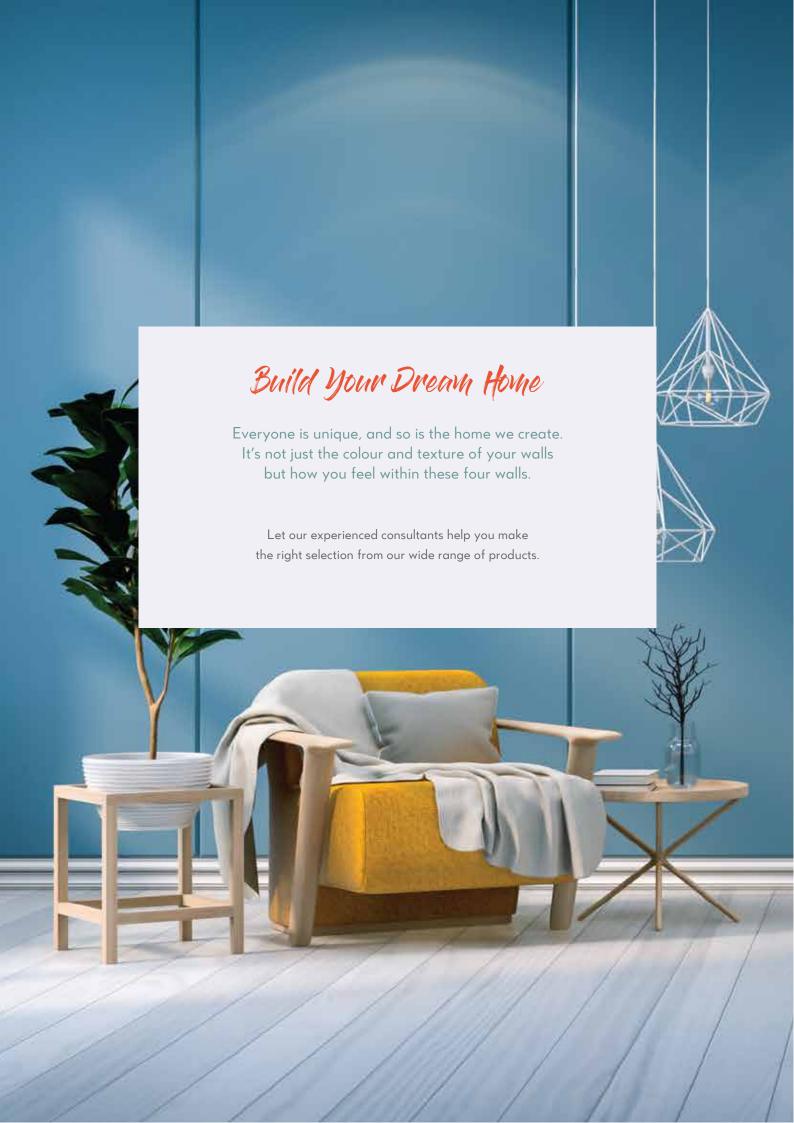

## Purion - Feature Wall - Eco Wall



Impress your guests with Purion Feature Wall – Eco Wall. A 100% natural wall – boasting both classic and modern designs. Handmade to match your desired interior theme while encompassing the ability to function as an air filter. Giving you peace of mind – knowing your children and elderly can enjoy better air quality and well-being at home.

### Contains Wellness Material - Diatomite

Purion Eco Wall is made from 100% natural diatomite which has high porosity characteristics. It is highly absorbent, removing moisture and harmful compounds in the air.

#### **ECO WALL FEATURES**



Zero VOC



100% Natura



Asthma & Allergy Friendly



Anti-Mould & Anti-Bacterial



Thermal & Humidity Control



Fire Retardant



# Some of our Feature Wall Designs









Some of our feature wall textures



### **Purion Paint Products**

#### **Ocean Series**









### **Wellness Series**











### **Specialised Series**







### **Purion Series**







#### **OCEAN NANO PAINT**

1 Near Zero VOC

2 Formaldehyde removal by Composite catalyst technology

- 3 Removes 99.5% Formaldehyde
- 4 Anti-bacterial powered by natural Ag+ ions
- 5 Easy wash and anti-contamination

6 Various colours to choose from and long lasting

Ultra Low VOC

Asthma & Allergy Friendly

Odour Free





General Information:	
Ingrediants	TiO <sub>2</sub> , SiO <sub>2</sub> , C <sub>3</sub> H <sub>4</sub> O <sub>2</sub>
Uses	Interior Wall
Application	Roller or Brush
Finishing	Matt Finishing
Coverage	12-14m <sup>2</sup> /lb , 30 microns DFT
Dilution	10%
Moisture	Moisture level must be <10%, PH<10
Storage	Temperate ≤35°C₂, Humidity
Drying	Approx 45 mins
Packaging	5L

### **WELLNESS ECO HOME**

- 1 Up to 90% Formaldehyde removal rate
- 2 Easy application
- 3 Humidity balance
- 4 Anti-fungus and anti-algae properties
- 5 Easy maintenance

Ultra Low VOC Asthma & Allergy Friendly

Odour Free





General Information:		
Ingrediants	TiO <sub>2</sub> , SiO <sub>2</sub> , C <sub>3</sub> H <sub>4</sub> O <sub>2</sub>	
Uses	Interior Wall	
Application	Roller or Brush	
Finishing	Matt Finishing	
Coverage	12-14m <sup>2</sup> /lb , 30 microns DFT	
Dilution	10%	
Moisture	Moisture level must be <10%, PH<10	
Storage	Temperate ≤35°C₂, Humidity	
Drying	Approx 45 mins	
Packaging	5L	



### **WELLNESS ION HOME**

- 1 Up to 90% Formaldehyde removal rate
- 2 Anti-bacterial powered by Ag+ ions
- 3 Anti-fungus and anti-algae properties
- 4 Easy maintenance



Asthma & Allergy Friendly

Odour Free



General Information:	
Ingrediants	TiO <sub>2</sub> , SiO <sub>2</sub> , C <sub>3</sub> H <sub>4</sub> O <sub>2</sub>
Uses	Interior Wall
Application	Roller or Brush
Finishing	Matt Finishing
Coverage	12-14m <sup>2</sup> /lb , 30 microns DFT
Dilution	10%
Moisture	Moisture level must be <10%, PH<10
Storage	Temperate ≤35°C
Drying	Approx 45 mins
Packaging	5L



### **PURION FINISH PAINT**


- 1 Natural material and odour-less
- 2 Ultra-low VOC
- **3** Easy application
- 4 Easy maintenance and long lasting

Ultra Low VOC

Asthma & Allergy Friendly

Odour Free



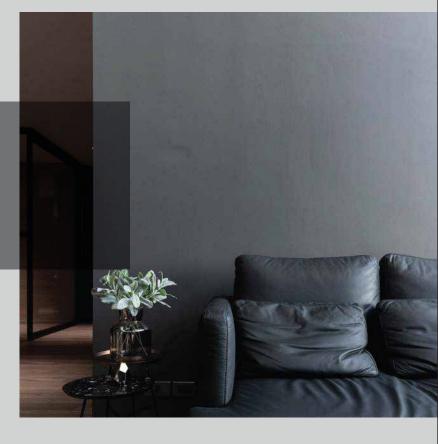

General Information:	
Ingrediants	TiO <sub>2</sub> , SiO <sub>2</sub> , C <sub>3</sub> H <sub>4</sub> O <sub>2</sub>
Uses	Interior Wall
Application	Roller or Brush
Finishing	Matt Finishing
Coverage	12-14m <sup>2</sup> /lb , 30 microns DFT
Dilution	10%
Moisture	Moisture level must be <10%, PH<10
Storage	Temperate ≤35°C <sub>2</sub> , Humidity
Drying	Approx 45 mins
Packaging	5L / 18L

### NANO EXTERIOR PAINT

- 1 Good levelling property
- **2** Easy application
- 3 Easy maintenance and durable surface
- 4 Anti-fungus and anti-algae properties

Ultra Low VOC

Asthma & Allergy Friendly

Odour Free





### **PURION UNDERCOAT**

- 1 Firm baselayer
- 2 Increase topcoat coverage
- 3 Alkali resistance to reduce discoloring risk
- 4 Extreme bonding power to firm base layer
- 5 Humidity balance, anti-fungus and anti-algae

Ultra Low VOC Asthma & Allergy Friendly

Odour Free



General Information:	
Ingrediants	TiO <sub>2</sub> , SiO <sub>2</sub> , C <sub>3</sub> H <sub>4</sub> O <sub>2</sub>
Uses	Interior Wall
Application	Roller or Brush
Finishing	Matt Finishing
Coverage	12-14m /lb , 30 microns DFT
Dilution	10%
Moisture	Moisture level must be <10%, PH<10
Storage	Temperate ≤35°C , Humidity
Drying	Approx 45 mins
Packaging	18L



Website: www.purion.com.sg Email: enquiries@purion.com.sg Contact Number: +65 6262 1230

Office Address
ES PURIFY PTE LTD
13 Kaki Bukit Road 4 #03-01 Bartley Biz Centre
Singapore 417807